
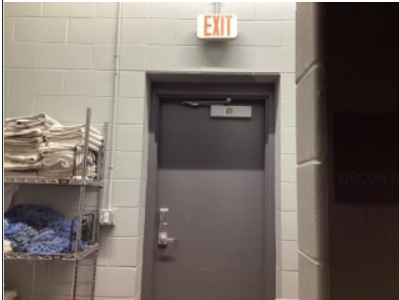




**Town of Randolph
North Randolph Fire Station**

ID	Location	Floor	Room	Element	Type	Photo	Issues	Current Measure	Recommendations	Quantity	Price	Cost Estimation
Approach and Entrance												
Emergency Exit												
1	East Accessible Egress in Apparatus Room	1		Emergency Exit	N/A		Tactile sign not provided at exit Illuminated Int. Symbol of Acc. not provided (MAAB 2006)	- -	Provide tactile exit signs with raised characters and braille at exit doors. Mount signs between 48"- 60" above the finished floor located on the latch side of the door. Provide an illuminated sign with the International Symbol of Accessibility (ISA).	1	432	\$432
2	West Accessible Egress in Laundry Room Next to Apparatus Room	1		Emergency Exit	N/A		Tactile sign not provided at exit Illuminated Int. Symbol of Acc. not provided (MAAB 2006)	- -	Provide tactile exit signs with raised characters and braille at exit doors. Mount signs between 48"- 60" above the finished floor located on the latch side of the door. Provide an illuminated sign with the International Symbol of Accessibility (ISA).	1	432	\$432
3	West Accessible Egress Next to Apparatus Room	1		Emergency Exit	N/A		Tactile sign not provided at exit Illuminated Int. Symbol of Acc. not provided (MAAB 2006)	- -	Provide tactile exit signs with raised characters and braille at exit doors. Mount signs between 48"- 60" above the finished floor located on the latch side of the door. Provide an illuminated sign with the International Symbol of Accessibility (ISA).	1	432	\$432
Toilet & Bathing Rooms												
Lavatory												
4	Single-User Toilet Room By Main Entrance	1		Lavatory	N/A		Clear floor space not provided at lavatory	-	Provide at least one lavatory with a 30" min. by 48" min. clear floor space positioned for a forward approach. (Relocate bucket.)	1	Labor	\$0